

## **NexPrint**

This is semi automatic "high performance standard press" offers many features from sudharsan.






## **NexPrint**

22 x 28

adjustment Screen Height Vaccum Bed Counter Squzer Pressure

Imported vaccum blower for bed vacuum.

Bed Micro Moment Bed Bottom Lock VFD Control

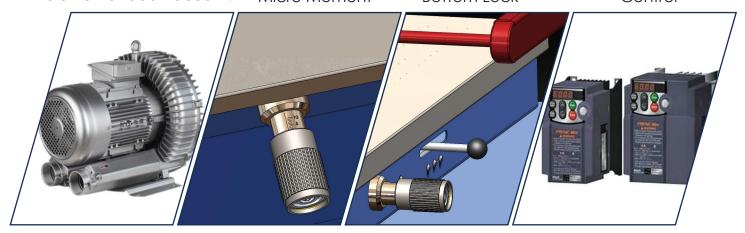

- Multi stroke for squzzing.
- □ Dry mode, wet mode for coating position.
- □ Peel off system for screen off contact.
- □ Variable screen size for small and large printing area.
- □ Individual squzeey pressure for left and right position.
- □ Individual coating leveler for left and right position.
- □ Ironizer mounting in print head.(optional)

- □ Imported warm gear box for print head drive.
- □ Imported warm gear box for screen print lifting system.
- Oil free print head movement
- □ Imported leanier guide system for printed.
- stainless 304 grade bed surface.
- Dial mounting option for bed movement (Optional)




## **NexPrint**

22 x 28









Description	
Max Print Area	22" x28 (559 mm x 711 mm)
Vacuum Bed	26.7x 35 (678 mm x 912 mm)
Vacuum Bed Movement for Registration	± 7 mm
Cycle Time	1050/ per hour non stop
Screen Frame Size	Min: 26(660 mm x 508 mm)
	Max: 34 (864 mm x 1016 mm)
Max Off- Contact	10mm
Max Substrate Thickness	3mm
Screen Frame Thickness	1.0
Squeegee Holders along with machine	16" (406 mm) min & 24" (610 mm) max
Squeegee Holders Angle	19°
Flood Coater	20" (508 mm) min & 26" (660 mm) max
Power Consumption	220V AC, single phase, 7 Amps, 50 HZ, 2 HP (1.5 kW)
Dimensions (LxWxH)	50 x 37.4 x 52 (1250 x 950 x 1330 mm)
Weight	310 Kg